



Objectives

- Ideal choice for residential and commercial EV charging.
- Optional RFID card reader, APP based for user identification / security Protocols and management.
- Input: 380VAC – 440VAC
- Output: - 32A@440VAC .
- Stylish, ergonomic and customizable design.
- Firmware OCPPv1.6 updates through remote connection.
- Charging interface: Input plug Type-2 pin female connector.
- User friendly LCD Touch display for customer interface.
- Wired connectivity, Easy to install, operate and service.
- Safety Measures-Emergency stop button with 18 various type protection.
- Robust IP54 ingress protection for indoor/outdoor applications.



Applications

- Highway Fuel Outlets/service station
- Parking garage/back office
- Mall, shopping complex, university
- Commercial fleet operators
- EV infrastructure operators and service providers
- EV dealer workshop




Model List

Function	Type-1	Type-2	Type-3	Type-4
	BASIC	LAN	Wi-Fi	4G
RFID	X	•	•	•
LAN	X	•	•	•
Wi-Fi	X	X	•	X
4G	X	X	X	•
OCPP	X	•	•	•



SL. No.	Parametrs	Requirments	
General Information			
1.	EV Charger Type	AC	
2.	System Capacity	14kw	44kw
3.	Mounting	Wall-Mounting	
Input Requirement			
4.	AC Supply System	380VAC- 440VAC	
5.	Input voltage	3-Phase 400V±10%	
6.	Wires	5 Wires,L1,L2,L3,N,PE	
7.	Input Frequency	50Hz / 60Hz	
Output Power			
8.	Number of outputs	2 No.	
9.	Output connectors	IEC 62196 Type-2	
10.	Output capacity	7kw(32Amp)*2	22kw(32Amp)*2
Environment			
11.	Ambient Temperature	-20°C to 55°C	
12.	Storage temperature	-20°C to 60°C	
13.	Altitude	<2000 Mtr.	
14.	Humidity	5% to 95%, non-condensing	
15.	Cooling method	Natural Cooling	
User Interface & Control			
16.	Display	4.3”TFT LCD with Touch Display	
17.	Language	English	
18.	Push Button	Emergency stop	
19.	User Authentication	Mobile Application or user interface/ QR Code / RFID Card/ Password Login	
20.	Metering Information	Consumption Units(kWh)	
Communication			
21.	Communication Between EVSE and CMS	OCPP v 1.6 or above- 10/100 Base - T Ethernet (standard)/ Optional GSM Modem (2G/3G/4G) or Wireless	
22.	Communication Between Charger & Vehicle	CP Based Communication as per AIS 138	
Mechanical			
23.	IP Rating	IP 54 / IK 10	
24.	Cable length	5 Meters	
25.	Dimension (WxDxH)	NA	
26.	Weight	65Kg	
Protection & Safety			
27.	Safety Parameters	Over Current, Under Voltage , Residual Current , Surge Protection, Leakage Protection , Short Circuit, Over Temperature, etc.	

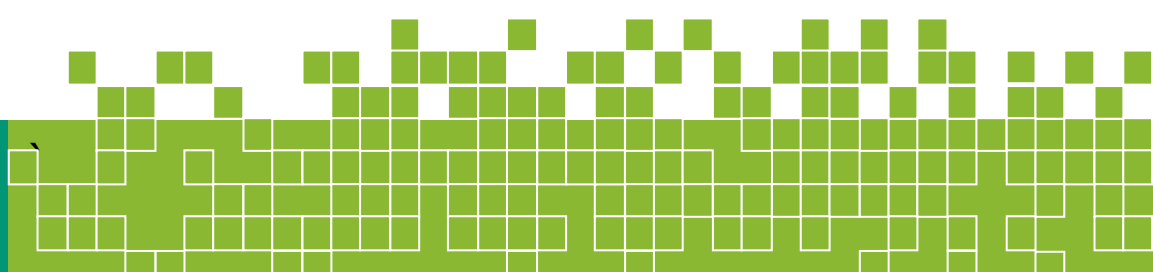



Objectives

- Ideal choice for residential and commercial EV charging.
- Optional RFID card reader, APP based for user identification / security Protocols and management.
- Input: 43kw (380VAC – 440VAC)
- Output: - For 43kw 63A@440VAC .
- Stylish, ergonomic and customizable design.
- Firmware OCPPv1.6 updates through remote connection.
- Charging interface: Input plug Type-2 pin female connector.
- User friendly LCD Touch display for customer interface.
- Wired connectivity, Easy to install, operate and service.
- Safety Measures-Emergency stop button with 18 various type protection
- Robust IP55 ingress protection for indoor/outdoor applications.




Applications

- Highway Fuel Outlets/service station
- Parking garage/back office
- Mall, shopping complex, university
- Commercial fleet operators
- EV infrastructure operators and service providers



Model List

Function	Type-1	Type-2	Type-3	Type-4
	BASIC	LAN	Wi-Fi	4G
RFID	X	•	•	•
LAN	X	•	•	•
Wi-Fi	X	X	•	X
4G	X	X	X	•
OCPP	X	•	•	•

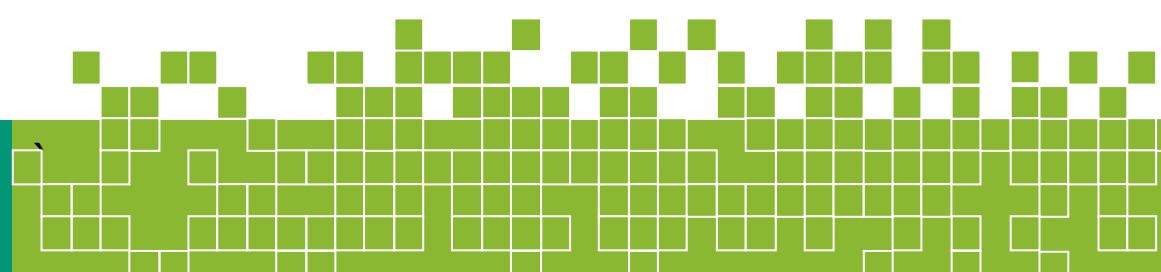



SL. No.	Parametrs	Requirments
General Information		
1.	EV Charger Type	AC
2.	System Capacity	43kw
3.	Mounting	Wall-Mounting
Input Requirement		
4.	AC Supply System	380VAC- 440VAC
5.	Input voltage	3-Phase 400V ±10%
6.	Wires	5 Wires,L1,L2,L3,N,PE
7.	Input Frequency	50Hz / 60Hz
Output Power		
8.	Number of outputs	1 No.
9.	Output connectors	IEC 62196 Type-2
10.	Output capacity	440VAC,Max.63Amp.
Environment		
11.	Ambient Temperature	-20°C to 75°C
12.	Storage temperature	-20°C to 75°C
13.	Altitude	<2000 Mtr.
14.	Humidity	5% to 95%, non-condensing
15.	Cooling method	Natural Cooling
User Interface & Control		
16.	Display	4.3”TFT LCD with Touch Screen
17.	Language	English
18.	Push Button	Emergency stop
19.	User Authentication	Mobile Application or user interface/ QR Code / RFID Card/ Password Login
20.	Metering Information	Consumption Units(kWh)
Communication		
21.	Communication Between EVSE and CMS	OCPP v 1.6 or above- 10/100 Base - T Ethernet (standard)/ Optional GSM Modem (2G/3G/4G) or Wireless
22.	Communication Between Charger & Vehicle	CP Based Communication
Mechanical		
23.	IP Rating	IP 55 / IK 10
24.	Cable length	5 Meter
25.	Dimension (WxDxH)	760 x 600 x 350mm
26.	Weight	45Kg
Protection & Safety		
27.	Safety Parameters	Over Current, Under Voltage , Residual Current , Surge Protection, Leakage Protection , Short Circuit, Over Temperature, etc

